
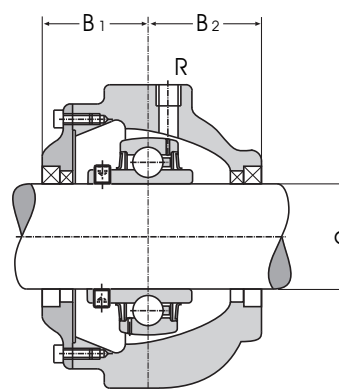




GEHÄUSE-LAGEREINHEITEN

Typenreihe STLU
FWSR
FWSRU

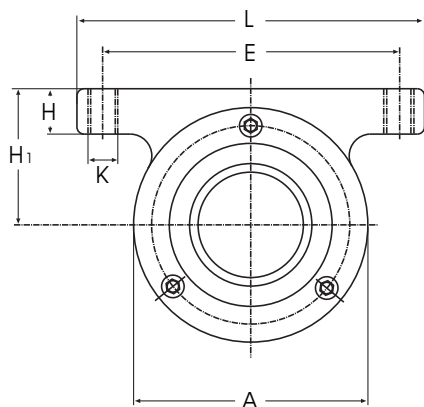


STLU

Kurzz. der Einheit	Wellen- durchmesser d	Kurzz. des Lagers	Gewicht kg	Tragzahlen		A
				dyn. c kN	stat. c ₀ kN	
FWSR 25	25	SA 205	2,8	14	7,8	-
FWSRU 25		UC 205	2,8	14	7,8	-
FWSR 35	35	SA 207	2,6	25,5	15,3	-
FWSRU 35		UC 207	2,6	25,5	15,3	-
STLU 40	40	UC 208	2,2	32,5	19,8	105
FWSR 45	45	SA 209	2,5	32,5	20,4	-
FWSRU 45		UC 209	2,5	32,5	20,4	-
STLU 50	50	UC 210	3,2	35	23,2	117
STLU 60	60	UC 212	5,2	52	36	140
STLU 70	70	UC 214	7,5	62	44	155

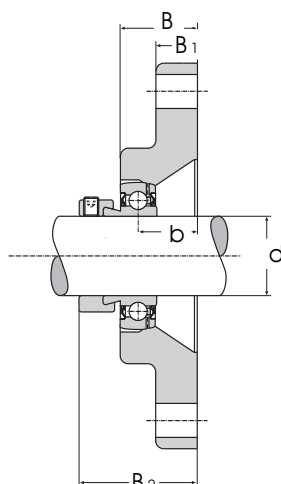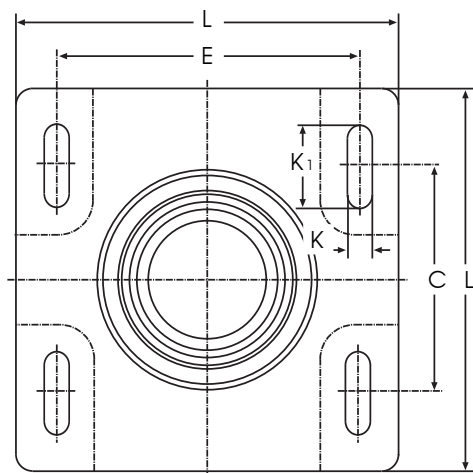

FWSR

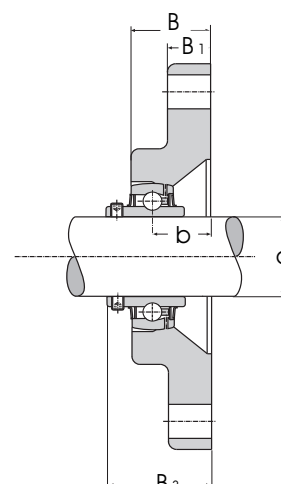

FWSRU

Wellen- durchmesser	Abmessungen in mm												
	d	L	E	K	K ₁	C	B	B ₁	B ₂	B ₃	b	H ₁	H
25	190	145	14	44	120	35	17	40,5	-	17	-	-	-
	190	145	14	44	120	35	17	-	36,8	17	-	-	-
35	190	145	14	44	120	35	17	46,4	-	17	-	-	-
	190	145	14	44	120	35	17	-	42,4	17	-	-	-
40	170	140	M 16	-	-	-	56	50	-	-	60	20	R 1/4"
45	190	145	14	44	120	35	17	49,7	-	17	-	-	-
	190	145	14	44	120	35	17	-	47,2	17	-	-	-
50	180	150	M 16	-	-	-	62	55	-	-	70	20	R 1/4"
60	230	190	M 20	-	-	-	77	67	-	-	90	25	R 1/4"
70	230	190	M 20	-	-	-	77	75	-	-	90	25	R 1/4"